
## Henderson canopy door roller spindles - Fitting Instructions


All work to be carried out from inside the garage Tools required :- Screwdriver, 1/4" dia toggle bar Crook pin (supplied in HEN0230 tool kit)


## Removal and replacement instructions

Note: You will need assistance when replacing and removing the crook pin. In order to ease the spring pressure place a 1/4" dia toggle bar into the hole in the spring plug as shown, and turn it upwards. This will allow a crook pin to be inserted or removed.

If all the spring tension has been lost a spring re-tensioning tool kit will also be required - (Our Ref: HEN0230)








Note: This may not be possible if the door jamb is close to a wall - it may be necessary to remove the door from the opening. (see separate instructions opposite)


3/ Remove the cable by passing the loop over the roller, prize-off the retaining circlips from the spindle. Note: pre 1981 type rollers were secured with a hex nut & washer

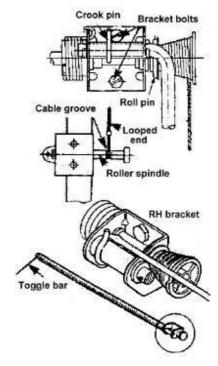

## To remove the door

- a) Insert a crook pin into right hand head bracket
- b) Wedge the door in the opening so it will not move c) Unscrew and remove the side jamb channels
- d) Remove the head bracket bolt and lower the spring
- e) Lift the door from the opening

In the interest of personal safety the work should be carried out in strict accordance with these fitting instructions



Side

jamb channel

Henderson canopy door roller spindles

Our Ref: HEN0150, HEN0170, HEN0190, HEN0200

All work is undertaken at your own risk



The UK's #1 Garage Door Spares and Automation Specialists
©Copyright 2010 Amourelle Products Ltd Reading, Berkshire. United Kingdom
Established 1982 - Registered in England No. 01640847 - VAT Reg. No. GB 642 0832 61

www.Garage-Door-Spares.co.uk